




TORO REELMASTER 5410D

The Reelmaster® 5410 features 5-inch Dual Precision Adjustment (DPA) cutting units to deliver an exceptional quality-of-cut and after-cut appearance. The Reelmaster 5410 includes powerful Tier 4-compliant diesel engines that can be equipped with our exclusive CrossTrax® all-wheel drive system for exceptional power and control.

Excellent operator comfort and outstanding serviceability are already included in each of the industry-leading Reelmaster 5010 Series models.

- Improved access to routine service points and service components, along with a robust machine design, results in less frequent maintenance intervals and less time is required to perform maintenance tasks.
- The Reelmaster is powered by a 36.8 hp (27.5 kW) Yanmar® diesel engine that includes an exhaust after-treatment system that ensures machine emissions meet the EPA requirements and that your course can do its part for the environment.
- Optimized design and use of lightweight materials means less weight and turf compaction without sacrificing performance and functionality.
- All of the indicators and controls to operate the unit are conveniently located on the right armrest. Control console pivots back for right hand entry and exit. Tilt steering, deluxe suspension seat, improved visibility and lower operating noise enhance the operator experience and help to reduce fatigue.
- Dual Precision Adjustment (DPA) cutting units – featuring Toro’s EdgeSeries™ reels combine to deliver a consistent, high quality cut and superior after cut appearance, while reducing maintenance with improved reel edge retention.

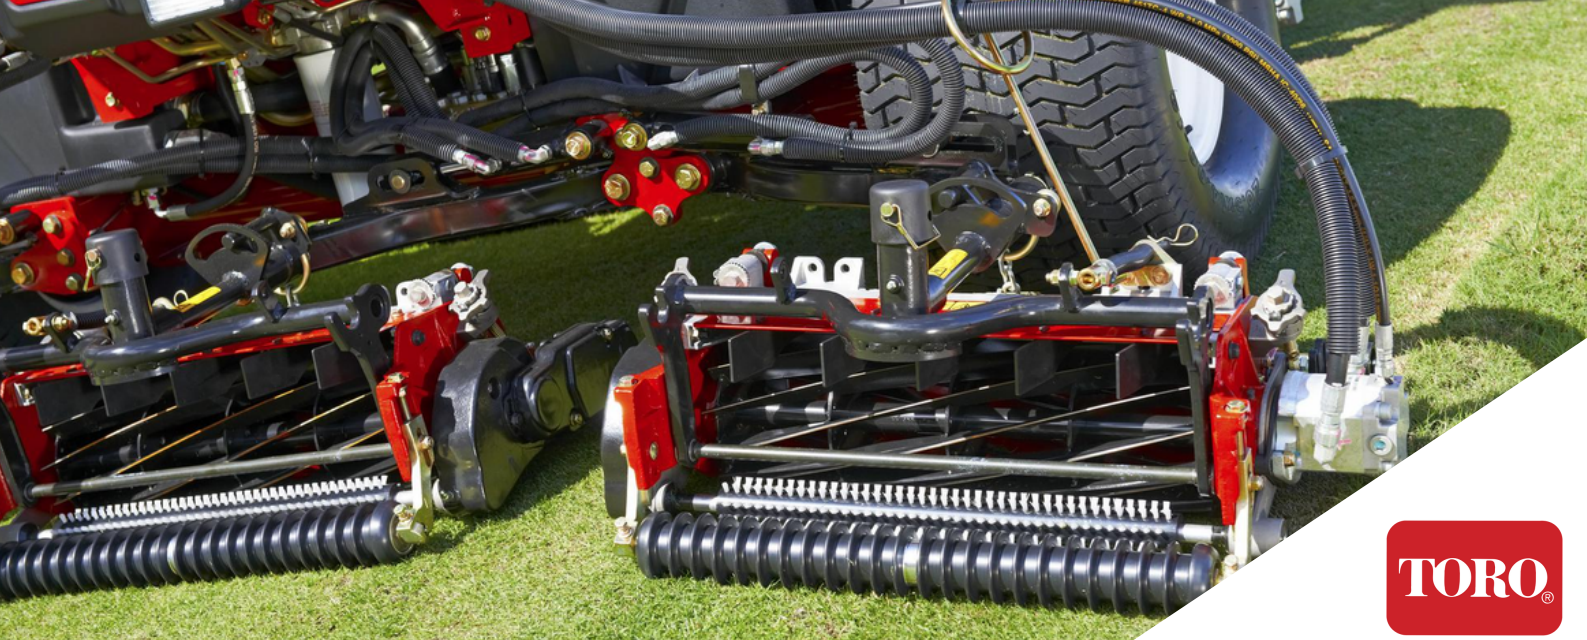

Specifications:

MODEL	03952	DRIVETRAIN	Hybrid
BATTERY	12V	ELECTRICAL SYSTEM	Heavy-duty 12-volt battery, 570 CCA, 55 amp alternator. Electronic control unit is a microprocessor based, solid state control unit with diagnostic capabilities.
BLADE TYPE	EdgeSeries™ DPA radial or forward swept reels.	ENGINE COOLING	Liquid Cooled
CLIP	Manually controlled, variable reel speed for control of clip frequency. Reel speeds are incrementally adjustable between 200 - 2,000 rpm with a backlap speed of 200 rpm.	FUEL CAPACITY	53 L
FREQUENCY/BACKLAPPING	Standard on-board backlapping.	FUEL FILTER	Replaceable spin-on fuel filter/water separator.
COOLING SYSTEM	Plate and bar radiator/oil cooler combination, 6.3 fins per inch, 10 quart (9.5 liter) capacity.	GROUND SPEED	Forward: 0 - 16.1 km/h Reverse: 0 - 6.4 km/h
CUTTING UNIT ACCESSORIES	Rear Roller Brush Kit, Universal Groomer, Broomer, Grass Baskets	HEIGHT OF CUT	6.4 mm - 38.1 mm
CUTTING UNIT LIFT/LOWER	Hydraulic - front and rear cutting unit lift/lower are sequenced for uniform starting and ending points.	HYDRAULIC FLUID TYPE	Toro PX™ Extended Life Hydraulic Fluid
CUTTING UNIT TYPE/CONFIGURATION	5-plex, hydraulically driven, balanced cutting units with adjustable rear weight transfer spring. Cutting units feature quick disconnect for removal/installation and are interchangeable to all positions. Cutting units also feature rear throw capability.	ENGINE	Yanmar® 3-cylinder, liquid-cooled, diesel engine. 27.5 kW (36.8 hp), 105 N·m torque, 1.64 litre displacement. Tier IV compliant.
		OIL CAPACITY	4.7 L

QUALITY BRANDS, EXCEPTIONAL SERVICE.

