



**WORKMAN® GTX**  
UTILITY VEHICLE



SIMPLY SUPERIOR

WORKMAN® GTX  
SIMPLY SUPERIOR



**We set out to build a utility vehicle that is simply superior to the rest.**

The result is the grounds and turf crossover Workman GTX. It boasts an unequalled combination of comfort, utility and control that makes it simply superior to the competition. Its power, steering and exclusive suspension and braking systems make the Workman GTX the most versatile, practical, and comfortable utility vehicle in its class. So whether you are changing cups, checking on irrigation, working around campus, or moving people or materials, the Workman GTX has the power and versatility to get the job done right.





## WE MADE IT LIGHTER AND STRONGER TO GIVE IT SUPERIOR POWER

Whether you choose the 429 cc petrol or 48 volt electric Workman® GTX, power and performance come standard. An impressive power to weight ratio boosts payload capacity and productivity. The Workman GTX is the smarter, more efficient way to get the job done!

WORKMAN® GTX  
SUPERIOR VERSATILITY





## WE MADE IT FIT YOUR NEEDS. ALL OF THEM.

Introducing your new vehicle, watering rig, people mover, utility cart, toolbox, irrigation cart, material hauler, cruiser, garbage collector, crew shuttle, equipment transporter ... best friend. The Workman® GTX is adaptable for any task. Two or four-seat configurations come with bench or bucket seats. Front and rear attachment points for garbage cans, hose reels or walk spreaders free up the bed for more hauling capacity. 4ft (1.2 m) and 6ft (1.8 m) flat beds are available. With over 300 unique configurations available, you are sure to find the one that fits your needs.



WORKMAN® GTX

# SUPERIOR DURABILITY



## **We were tougher on it than you will ever be.**

Virtually unbreakable exterior components and a powder coated frame and underbody give the Workman GTX superior durability. How do we know? We pushed it to the limits with the most punishing field and labs tests. The Workman GTX has been through it all so you can run it hard, day after day with confidence.

## SUPERIOR DETAILING

### **We made sure to do the little things right**

We didn't think of everything. You did. We just listened. We gave it hydraulic disc brakes to minimize maintenance and provide consistent, safe stopping. Full access to the engine compartment makes services a breeze. Storage is abundant and two standard USB ports make a dead phone on the job a thing of the past.




## SUPERIOR SUSPENSION

---

# WE BROKE THE MOULD TO GIVE IT THE MOST COMFORTABLE RIDE

Coil-over shocks on all four tyres deliver greater suspension travel and adjustability resulting in a smoother ride and minimized operator fatigue. We also made it the only vehicle in its class to feature a split frame to further increase ride comfort.

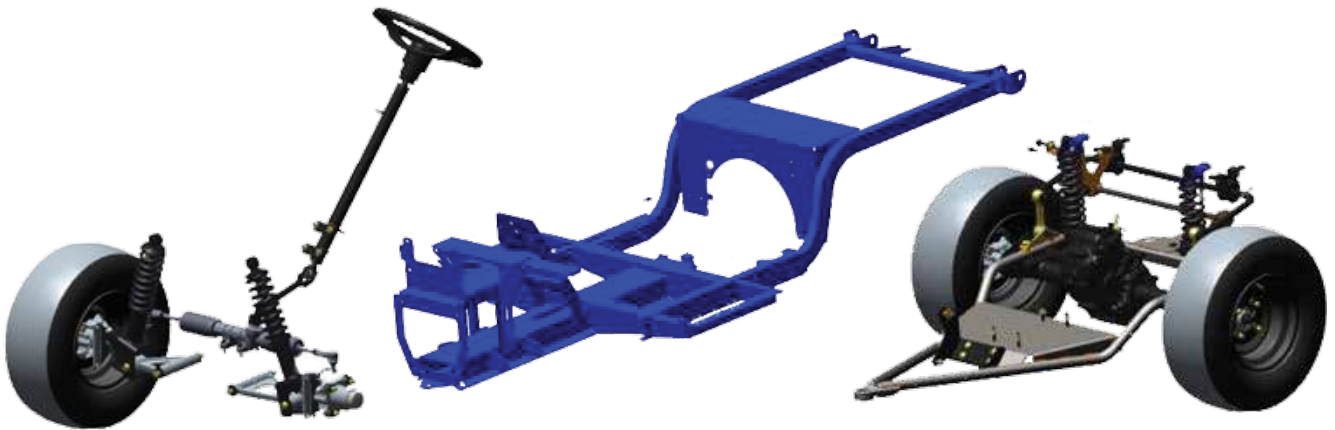

# WORKMAN® GTX SPECIFICATIONS

	WORKMAN GTX (PETROL) MODEL 07042, 07152	WORKMAN GTX (PETROL) EFI MODELS 07059, 07060, 07042EX	WORKMAN GTX (ELECTRIC), MODEL 07043, 07153, 07043EX		
<b>POWER SYSTEM</b>	429 cc, air-cooled, single-cylinder Kohler® petrol engine. Meets current EPA & CARB exhaust and evaporative emissions regulations.	429 cc, air-cooled, single cylinder Kohler® EFI petrol engine. Meets current EPA & CARB exhaust and evaporative emissions regulations.	48V brushless AC induction drive.		
<b>STEERING</b>	Manual rack and pinion steering system with ergonomically positioned column. Steering wheel has 2.75 turns lock-to-lock with 13.75" (35 cm) diameter.				
<b>TURNING RADIUS</b>	<b>Standard model:</b> turning clearance circle: 20.7' (6.3 m), inside turning radius: 60.25" (153 cm). <b>Extended model:</b> turning clearance circle: 31' (9.45 m), inside turning radius: 100" (254 cm).				
<b>BRAKES</b>	Front and rear wheel hydraulic disc brakes.				
<b>SUSPENSION</b>	FRONT - Modified MacPherson Strut. REAR - Articulating Swing Arm. Adjustable Coil Over Shocks at all four wheels.				
<b>SUSPENSION TRAVEL</b>	Front Suspension Travel: 3.5" Rear Suspension Travel: 4".				
<b>FUEL CAPACITY</b>	5 gallons (18.9 liters)	5 gallons (18.9 liters)	N/A		
<b>GROUND SPEED</b>	16 mph (25.6 km/h) governed. Speed reduction kits available.		16 mph (25.6 km/h), adjustable.		
<b>TRANSAXLE</b>	11.47:1 Forward, 14.35:1 Reverse	11.47:1 Forward, 14.35:1 Reverse	17:1 double-reduction high torque.		
<b>GROUND CLEARANCE</b>	Front: 8.5" (21.6 cm), Rear: 6.1" (15.5 cm)				
<b>TIRES</b>	20 x 8-10, 4-ply. Or alternate 4-ply/6ply.				
<b>BATTERIES</b>	One 12-volt starter battery		Eight Trojan® T-125 Advanced Deep Cycle 6V batteries featuring a single port fill system and water level indicators.		
<b>CONTROLLER</b>	N/A		540 amps max with regenerative motor braking, roll-away protection, thermal cutback, sealed/ waterproof, status light and three power modes.		
<b>CHARGER</b>	N/A		On-board high efficiency 1kW smart charger with 85-265VAC global input, temperature controlled, sealed & waterproof, remote indicator viewable at charge port.		
<b>ELECTRIC MOTOR</b>	N/A		Brushless high-torque AC Induction motor with 5.0kW continuous power.		
<b>INSTRUMENTS/DASH</b>	Hour meter, fuel gage, USB power port, headlight switch, on/off ignition key switch, gear selector and parking brake lever. Two cup holders, radio holder and three in-dash storage compartments.		Hour meter, battery level indicator, USB power port, headlight switch, on/off ignition key switch, gear selector and parking brake lever. Two cup holders, radio holder and three in-dash storage compartments.		
<b>STARTING</b>	Pedal or key start capability standard.		Pedal start.		
<b>DIMENSIONS</b>	<b>Vehicle Configuration</b>	<b>Width</b>	<b>Length</b>	<b>Height:</b>	<b>Wheel Base</b>
	2-Seat with Bed	47" (1.2 m)	119" (3 m)	50.2" (1.3 m)	77.8" (1.97 m)
	4-Seat with Bed	47" (1.2 m)	144" (3.6 m)	50.2" (1.3 m)	114" (2.9 m)
<b>CAB DIMENSIONS</b>	<b>Height</b>	<b>Width</b>			
	79" (201 cm)	56" (142 cm)			
<b>WEIGHT</b>	<b>Vehicle Configuration</b>	<b>Weight</b>	<b>Vehicle Configuration</b>	<b>Weight</b>	
	2-Seat with Bed	875 lbs. (397 kg)	2-Seat with Bed	1395 lbs. (633 kg)	
	4-Seat with Bed	1150 lbs. (522 kg)	4-Seat with Bed	1670 lbs. (757 kg)	
<b>CARGO BED</b>	<b>Width</b>	<b>Length</b>	<b>Height</b>	<b>Capacity:</b>	
	38.5" (97.8 cm)	40" (101.6 cm)	11" (27.9 cm)	800 lbs (363 kg)	
<b>VEHICLE CAPACITY</b>	2-seat with bed 1,200 lbs. (544 kg)				
<b>TOWING CAPACITY</b>	1,000 lbs. (454 kg) Class 1 – 1.25" receiver standard.				
<b>OPTIONAL ACCESSORIES</b>	Canopy, solid folding windshield, 4-seat configuration, flat bed, 6-foot flat bed, storage box, hose reel mounting bracket, walk spreader carrier, trash can mount, bed racking, electric bed lift, brush guard, 12V outlet, Brake/tail/signal lights, ROPS certified hard cab, horn kit, back up alarm kit, parking brake alarm kit, L-track attachment system, all-terrain tire kit, 2-post ROPS kit, beverage cart, range cage, glass windshield and medical-bed.				
<b>WARRANTY</b>	Two-year or 1500 hour limited warranty. Three-year engine warranty. Refer to the Operator's manual for further details.				

\* Assumes two 91kg (200 lb) passengers

## toro.com

Worldwide Headquarters  
The Toro Company  
8111 Lyndale Ave. So.  
Bloomington, MN 55420 U.S.A.  
Phone: (1) 952 888 8801  
Fax: (1) 952 887 8258

Printed in U.S.A.  
©2018 The Toro Company.  
All Rights Reserved.  
19-206-GB revc



facebook.com/ToroCompany  
twitter.com/TheToroCompany  
youtube.com/ToroCompanyEurope



Count on it.