

# **5-UNIT REEL MOWER**

The TORO T4240 is a high output reel mower able to compete with tractor-drawn gang mowers in large open areas, with the versatility to be used in confined spaces as either a triple or a five-unit machine. Excellent all-around visibility from the seating position allows cutting up to obstacles and helps ensure a safer operation. Includes cab.

#### **ROPS Certified Cab**

Comes with a ROPS certified cab installed. The fully glazed all-weather cab gives maximum visibility, safety & comfort. Air conditioning & heating systems are also available.

#### **Switchable Drive Mode**


Has two switchable drive modes to suit the different traction requirements for grass & road surfaces.

#### **Transmission System**

Allows the machine to deliver excellent high torque performance on slopes. Reduce travelling time between sites, the machine has a maximum transport speed of 22 km/h.

#### **Breakback System**

The two outer cutting units incorporate a breakback system, which minimises damage if contact is made with obstructions.

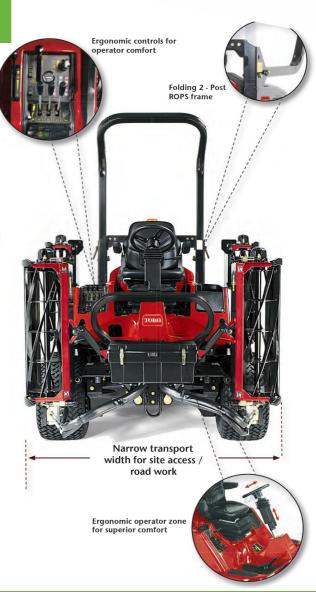



## **Specifications:**

### **Model T4240**

ENGINE

Kubota V2203, 4-cylinder liquid-cooled diesel engine (47.3 hp)

**TRANSMISSION** 

Closed loop hydrostatic 4WD with foot operated differential lock

GROUND PRESSURE

0.7 - 1.41 kg/cm (10 - 20 psi)

**STEERING** 

Hydrostatic rear wheel steering with shockload protection

**BRAKES** 

Hydrostatic service brakes (oil immersed disk brakes)

**FUEL SYSTEM** 

70 Litres

HYDRAULIC CAPACITY

77L Diagnostic hydraulic test ports, 10micron filtration

**TYRES** 

Front: 26 x 12.00-12; Rear: 20 x 10.00-8, 4 ply Turf pattern

SPEED

Mow: 13 km/h forward + 6.5km/h reverse. Transport: 22km/h forward + 11km/h reverse. CONTROLS

Cutting unit lift configuration switch, hand throttle, key ignition switch, cutting unit drive switch, adjustable seats

SEAT

Fully adjustable seat with arm rests, adjustable suspension

OPERATOR SAFETY Cutting unit drive disengages when operator leaves seat. Engine starts only when forward / reverse pedal is in neutral

WARNING LIGHTS Hydraulic oil temperature, engine preheat, engine coolant temp, battery charge, engine oil pressure, hydraulic filter blocks.

STABILITY

15 degrees with cab installed; 16 degrees without cab installed

SOUND POWER LEVEL

105 dB(A)

SOUND PRESSURE

87 dB(A)

2 Year Warranty

QUALITY BRANDS, EXCEPTIONAL SERVICE.















