



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH

Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany

Phone: +49 (0) 7306 96 65 0

Fax: +49 (0) 7306 96 65 50

E-mail: info@smg-machines.com




TurfKing - Maintenance
TurfKing TK1100 / TK1502



TurfKing - Maintenance

TurfKing TK1100 / TK1502



Item number/s:

6400136 / TK1100

6400148 / TK1502

Tractor device for the cleaning and care of artificial turf.

TurfKing TK1502 brush and vacuum system guarantees clean sports surfaces and optimum playing conditions. Conventional brush rows and/or drag mats are not suitable for thorough cleaning of floor coverings/deep cleaning and loosening of sand-filled and/or rubber-filled artificial turf. The 3-point rear-mount type accessory for compact tractors goes with any type of tractors with a power of at least 20 to 25 HP and combines all important basic functions in one machine. The device compact and easy to connect.

With the TurfKing, the required working depth can be precisely set via adjusting spindles - for all work operations, so that each individual function can be separately adjusted and carried out to suit the corresponding turf conditions. The polyester filter cartridges that are used are designed for long-lasting use and are de-dusted continuously.

SMG dust filters installed by SMG comply with DIN EN60335-2-69/dust class "M" and EN779 "F8" or "F9". Dust with a high proportion of fines as well as granulate/fibre abrasion (microplastics) are extracted via the powerful turbine and bound in the filter.

TurfKing - Maintenance

TurfKing TK1100 / TK1502

Detail views



TurfKing TK1100 / TK1502



Precision

Handwheel for comfortable adjustment and scale to control the working depth.



4 - 10 mm

SMG adjustable sieve for every particle size.

TurfKing - Maintenance

TurfKing TK1100 / TK1502

Detail views




Versatile

Material flap to adjust the flow of debris and infill.



SMG dust filter

Self-cleaning dust filter comply with DIN EN60335-2-69/dust class "M" and EN779 "F8" or "F9".

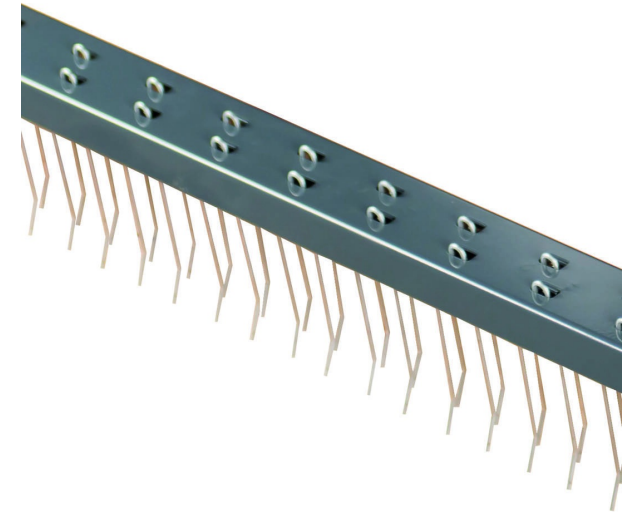

Gently

Working depth of the steel tines (optional) are adjustable for gently loosening of the infilling material .

TurfKing - Maintenance

TurfKing TK1100 / TK1502

Technical information

Working width	TK1100 = 1,100 mm TK1502 = 1,500 mm
Drive	PTO adaptor 540 rpm
Weight	TK1100 = 225 kg TK1502 = 280 kg
Dimensions	TK1100: L 900 x W 1,230 x H 830 mm TK1502: L 1,670 0 x W 950 x H 830 mm
Shipping dimensions	TK1100: L 1,300 x W 1,300 x H 1,100 mm TK1502: L 1,760 x W 1,300 x H 1,000 mm

Subject to technical changes



passion for sports grounds

SMG Sportplatzmaschinenbau GmbH | Robert-Bosch-Str. 3, DE - 89269 Vöhringen / Germany | Phone: +49 (0) 7306 96 65 0
Fax: +49 (0) 7306 96 65 50 | info@smg-machines.com | www.smg-machines.com